

Position	Description	Material
01	Body 1	C.S. A350 LF2
02	Body 2	C.S. A350 LF2
03	Ball	S.S. A351 CF8M
04	Seat	PTFE (modified)+CG
05	Stem	A182 F51
06	Stem seal	PEEK
07	Stem packing	Graphite
14	Body seal 1	PTFE (modified)+CG
19	Spring	Inconel X750
20	Antistatic ball	Inconel 625
22	Stop pin	S.S. AISI 316
31	Bearing	MU
32	Bearing disk	PTFE (modified)+FG
33	Support bearing	S275JR+ENP
34	Body seal 2	Graphite
35	O ring stem	FKM
41	Stud	A320 L7M
42	Nut	A194 7M
44a	Ring seat 1	S.S. AISI 316
44b	Ring seat 2	S.S. AISI 316
45	Spring	Inconel X750
46	Seat seal	Graphite
50	Subjection ring	S.S. AISI 420
86	Drain plug	C.S. A350 LF2
86a	Vent plug	C.S. A350 LF2
108	O ring seat	FKM
109	Cover seal	Graphite
110	Subjection ring seal	S.S. AISI 316 Nitrided
148	O ring cover	FKM
149	ISO cover	C.S. A350 LF2
151	Body cover 1	C.S. A350 LF2
152	Body cover bolt	S.S. (316)
153	ISO cover bolt	S.S. (316)
165	Stem bearing	PTFE (modified)+FG

General features


- Full trunnion.
- Three pieces.
- Full bore.
- Soft seat.
- Bidirectional.
- Spring loaded seat system.
- Anti Blow out proof stem.
- Anti static device.
- Self-cavity pressure relief.
- Double Block and Bleed.

Standards

- Top flange ISO 5211
- Flanges ANSI B16.5
- Face to face ANSI B16.10
- Testing API 598, API 6D, BS 6755-1
- Design API 6D, B16.34
- Materials according to NACE MR0175

Official approvals

- CERTIFICATE FIRE SAFE TA-LUFT VDI 2440
- ISO 15848-1
- API 6D.
- ATEX 2014/34/EU
- PED 2014/68/EU
- SIL 3 CAPABLE

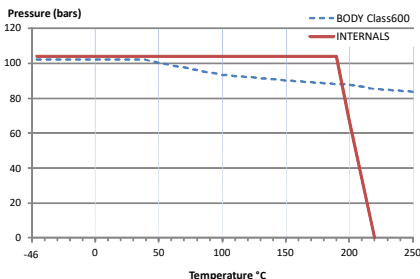

PEKOS GROUP CERTIFICATES:
ISO 9001: 2015 / 2014/68/EU /API-6D



DIMENSIONS & Technical information

DN	CL	D	L	E	A	B	C	F	H	G	V	X	Y	Z	n x d	ISO 5211	Torque	MAST	Weight
4"	600	100	435	275	175	216	47	175	336	547	36	27	35	50	8 x 25	F12	500	2356	108
6"	600	150	562	355	241	292	57	229	436	607	48	36	40	63	12 x 29	F14	1110	5585	232
8"	600	201	663	420	302	349	64	295	461	600	48	36	40	63	12 x 32	F16-1	1750	5585	415
10"	600	252	790	510	356	432	72	330	461	635	48	36	40	63	16 x 35	F16-1	2215	5585	659
12"	600	303	841	560	413	489	75	400	461	705	72	55	70	83	20 x 35	F25	2640	19103	880
14"	600	334	892	605	457	527	78	426	563	785	72	55	70	83	20 x 38	F25	4495	19103	1400
16"	600	385	994	685	508	603	85	465	578	824	72	55	70	83	20 x 41	F25	6020	19103	1696
18"	600	436	1095	745	575	654	91	511	781	946	98	75	100	106	20 x 45	F30	9185	48235	2994
20"	600	487	1200	815	635	724	98	569	**	**	98	75	100	106	24 x 45	F30	12460	48235	3475
24"	600	589	1407	940	749	838	113	667	**	**	120	32	-	220	24 x 51	F35	19295	32400	5200