


3 WAY “Y” TYPE

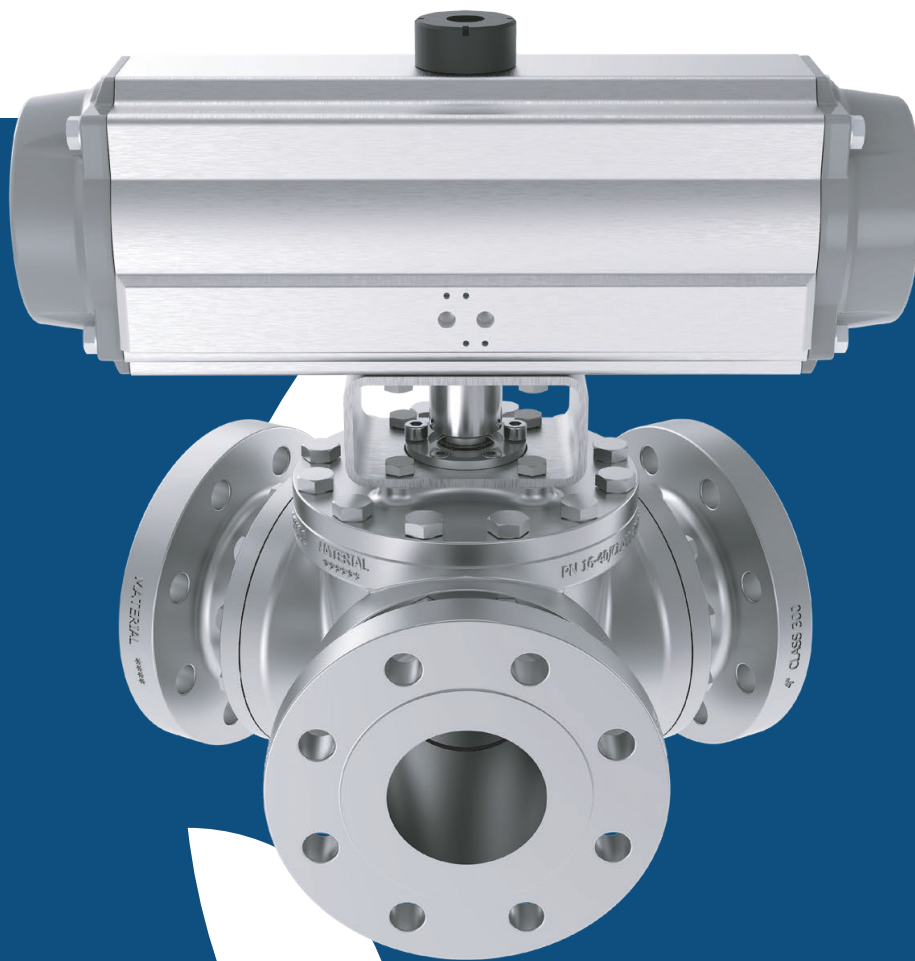

Diverter 3W 120°

3 Way 120° Piggable Product Diverter Ball Valves can be configured to allow non obstructed product transfer from one source to two selectable positions or from two selectable product sources to one destination.

Size & Rating

DIN		ANSI	
SIZE	RATING	SIZE	RATING
DN25-200	PN16	1-8"	CL150
DN25-100	PN40	1-4"	CL300

Materials

	DIN		ANSI	
	Z84	Z86	Z84	Z86
BODY	C.S. 1.0619	S.S. 1.4408	C.S. A216 WCC	S.S. A351 CF8M
BALL	S.S. 1.4408		S.S. A351 CF8M	
SEAT	PTFE Mod.		PTFE Mod.	
STEM	S.S. 1.4401		S.S. AISI 316	
STEM SEAL	PTFE Mod.		PTFE Mod.	
BODY SEAL	PTFE Mod.		PTFE Mod.	

