


SIMPLE STEM EXTENSION

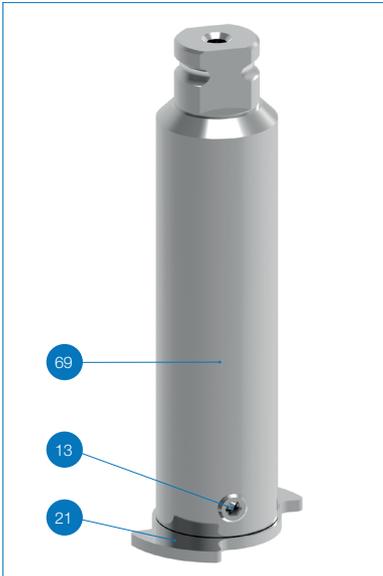

Material


| Piece | Description | Stainless Steel |
|-------|----------------|-----------------|
| 13 | Fixing bolt | A4-70 |
| 21 | Stop Washer | AISI 316 |
| 69 | Stem Extension | 1A410 /1.4021 |

| Up to 4"/DN100 | |
|----------------|--------------|
| 100 mm | Upon request |
| 150 mm | STOCK |

Features

- Mechanical extension only suitable for hand-lever operation
- Directly mounted on standard valves
- Mechanical travel-stop: no possibility to add locking device

Dimensions (mm.)

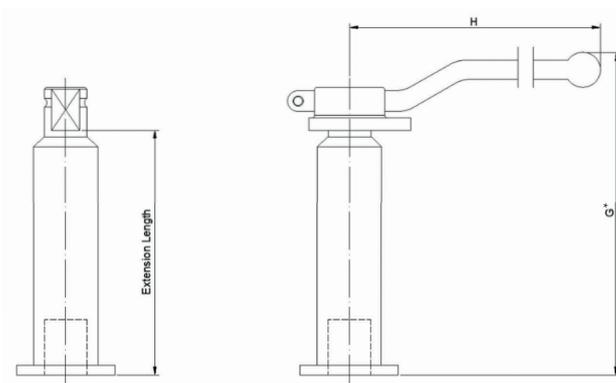

| ISO 5211 | H | Extension Length | G | Extension Length | G |
|----------|-----|------------------|-----|------------------|-----|
| F05/1 | 185 | 100 mm. | 155 | 150 mm. | 205 |
| F05/2 | 185 | 100 mm. | 155 | 150 mm. | 205 |
| F07 | 295 | 100 mm. | 160 | 150 mm. | 205 |
| F10 | 295 | 100 mm. | 180 | 150 mm. | 230 |

3 PIECE FLOATING SIMPLE STEM EXTENSION



Material


| Piece | Description | Stainless Steel |
|-------|----------------|-----------------|
| 13 | Screw | AISI 304 |
| 16 | Handle | AISI 304 |
| 21 | Stop washer | AISI 304 |
| 69 | Stem Extension | AISI 304 |

| | Up to FB 2" & RB 1/2" |
|--------|-----------------------|
| 100 mm | Upon request |
| 150 mm | STOCK |

Features

- Mechanical extension only suitable for hand-lever operation
- Directly mounted on standard type K valves
- T-handle design
- Mechanical travel-stop: no possibility to add locking device

Dimensions (mm.)



| ISO 5211 | H | Stem Length | G | Stem Length | G |
|----------|-----|-------------|-----|-------------|-----|
| F03 | 140 | 100 mm. | 122 | 150 mm. | |
| F03 | 140 | 100 mm. | 122 | 150 mm. | |
| F04 | 150 | 100 mm. | 130 | 150 mm. | 180 |
| F04 | 150 | 100 mm. | 130 | 150 mm. | 180 |
| F05 | 220 | 100 mm. | 140 | 150 mm. | 270 |
| F05 | 220 | 100 mm. | 140 | 150 mm. | 270 |
| F05 | 220 | 100 mm. | 140 | 150 mm. | 270 |
| F07 | 220 | 100 mm. | 140 | 150 mm. | 270 |